


qonvolv

KA008A  
**Knit Bottom Hemming Machine**



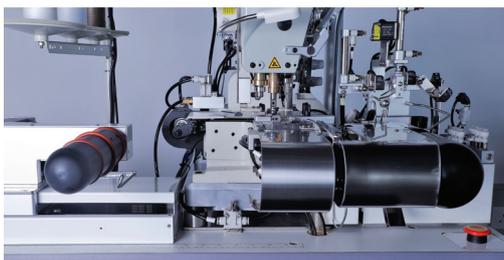

**Equipped with deviation correction, edge folding, and stitching alignment mechanisms. Simplified operation only requiring operators fitting the bottom side to the**

- Deviation correction and stitching alignment mechanisms ensure high level of finishing quality and consistency.
- Edge seam allowance is controlled at 2mm level for optimum evenness.
- Equipped with seam pouring function, ensuring side seams directions are aligned without twisting.
- Auto roller spacing adjustment for instant size changes.
- High productivity with average output up to 15 seconds per piece.
- Options available for thread locking and stack-

**Manual Operation**

22 sec./ pcs  
 Minimum 2 weeks training.  
 Unstable defect rates and varying by operator skills.

**KA008A Advantage**

15sec./ pcs  
 30 minutes training.  
 Consistent seam alignment, cutting edge and seam allowance.

**APPLICATIONS**

**Fabrications**

Jersey  
 1x1 Rib  
 Thin Sweater  
 Lycar Fabrics

**Size Range**

350-800 mm

**Edge Height**

18-28 mm

**SPECIFICATIONS**



Sewing Machine Head  
**PEGASUS W3662P-35B**



Dimensions (mm)  
**L: 1,350 x W: 820 x H: 1,680**



Stitch Type  
**Coverstitch (#416)**



Power (W)  
**850**



Compressed Air Requirement (Mpa)  
**0.5**



Power Supply (V)  
**AC 220 (50Hz)**



Needle  
**UY128**



Max. Sewing Speed (rpm)  
**4,000**



Changeover Time (m)  
**30**



Weight (kg)  
**100**



Output (pcs/ hr)  
**160**



**Quaternion Hong Kong Limited**  
 13/F, Harbour Center, 25 Harbour Road  
 Wanchai, Hong Kong

| +852 2811 8077  
 | cs@qonvolv.com  
 | www.qonvolv.com